



ZERO-TURN MOWERS



ZTR SERIES

Residential & Commercial

Combining top-tier components with world-class manufacturing, KIOTI ZTRs deliver the same quality, reliability and value KIOTI tractors are known for.

Ergonomic Controls

Comfortable Seating

User-friendly Control Panel

48", 54", & 60" Cutting Widths

Large Fuel Capacity

Excellent Cut Quality



HEAVY DUTY RESIDENTIAL

ZXR48
ZXR54
ZXR60

ZXR48 SE
ZXR54 SE
ZXR60 SE



Heavy Duty Chassis

Robust frame with strong tubular steel and foldable ROPS to protect operators.



Rear Guard

Steel rear guard to protect major components with convenient integrated tie-downs.



LED Headlights

LED headlights are standard on ZXR SE models and optional on ZXR models to improve visibility in low light conditions.



Operator Platform with Access Panel

Wide platform with tool-free access door is designed for operator comfort and convenience, while allowing for easy service and cleaning.



Dial-Type Adjustable Deck System

Ergonomically designed and simple to use adjustable deck system allows for precise cutting heights.



Digital Control Panel / Keyless Start

Easy to use push button keyless start and diagnostics panel comes with standard 12V charging adapter.



Engines

Models equipped with the following engines. ZXR / Briggs & Stratton Professional Series™ ZXR SE / Kohler Confidant™



Adjustable Suspension Seat

1.5" suspension seat is standard on ZXR SE models. The ZXR models can be outfitted with a 1" suspension kit.



Heavy Gauge Fabricated Deck

10-gauge fabricated deck in 48", 54", and 60" sizes with reinforced 7-gauge edge for long lasting durability.



COMMERCIAL GRADE

ZXC48
ZXC54
ZXC60

ZXC48 SE
ZXC54 SE
ZXC60 SE

ZXC48 LT
ZXC54 LT
ZXC60 LT




Integrated High Capacity Fuel Tanks

The large twin fuel tanks with 12.5 gallon total capacity will keep you mowing with less downtime for refueling.



Rear Guard

Steel rear guard to protect major components with convenient integrated tie-downs.

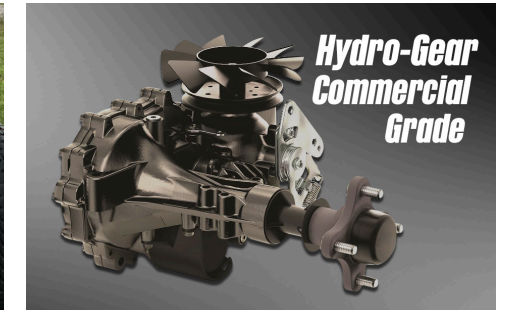

*Hydro-Gear
Commercial
Grade*

Commercial-Grade Transaxles

Mowers use Hydro-Gear commercial-grade transaxles for smooth, durable and reliable operation.



Operator Platform with Access Panel

Wide platform with tool-free access door is designed for operator comfort and convenience, while allowing for easy service and cleaning.



Dial-Type Adjustable Deck System

Ergonomically designed and simple to use adjustable deck system allows for precise cutting heights.



Digital Control Panel / Keyless Start

Easy to use push button keyless start and diagnostics panel comes with standard 12V charging adapter.



Engines

Models equipped with the following engines.
ZXC / Briggs & Stratton Commercial Series™
ZXC SE / Kohler Command PRO®
ZXC LT / Kawasaki FT730V



Premium Adjustable Seat Suspension

1.5" adjustable suspension seat is standard on ZXC models. ZXC SE and ZXC LT models come standard with a high back 3" suspension seat for maximum operator comfort.



Heavy Gauge Fabricated Deck

10-gauge fabricated deck in 48", 54" and 60" sizes with reinforced 7-gauge edge for long lasting durability.

SPECIFICATIONS

MODEL	ZXR48	ZXR54	ZXR60	ZXR48 SE	ZXR54 SE	ZXR60 SE	ZXC48	ZXC54	ZXC60	ZXC48 SE/LT	ZXC54 SE/LT	ZXC60 SE/LT	
MODEL	ZXR48	ZXR54	ZXR60	ZXR48 SE	ZXR54 SE	ZXR60 SE	ZXC48	ZXC54	ZXC60	ZXC48 SE/LT	ZXC54 SE/LT	ZXC60 SE/LT	
Type	Heavy-Duty Residential			Premium Heavy-Duty Residential			Commercial			Premium Commercial			
ENGINE	Briggs & Stratton Professional Series™						Kohler Command™			Kohler Command PRO® / Kawasaki FT730V+			
Type	Briggs & Stratton Professional Series™						Kohler Command™			Kohler Command PRO® / Kawasaki FT730V+			
Engine Gross	hp (kW)	22 (16.40)	24 (17.89)	27 (20.13)	21 (15.65)	23 (17.15)	25 (18.64)	23 (17.15)	25 (18.64)	27 (20.13)	22.5 (16.7)	24.0 (17.9)	
Displacement	cu. in. (cc)	44.18 (724)	44.18 (724)	49.42 (810)	44.24 (725)	45.58 (747)	45.58 (747)	44.18 (724)	44.18 (724)	49.42 (810)	42.35 (694)	44.3 (726)	
Choke	Auto	Auto	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	Manual Lever	
Fuel Capacity	US gal. (ℓ)	7.5 (28.39) (1 Tank on Left Side)						12.5 (47.31) (2 Tanks; Left and Right Side)					
Fuel Requirement	Unleaded Gasoline (87 Octane or higher)						Unleaded Gasoline (87 Octane or higher)						
DRIVE TRAIN	Hydrogear ZT2800						Hydrogear ZT3200						
Model	Hydrogear ZT2800						Hydrogear ZT3200						
Displacement (Pump/Motor)	cc						10/16						
PTO TYPE	125						200						
Clutch	t/h/b						15						
ELECTRICAL	16						15						
Changing System	amp						16						
TIRE SIZE	13x5-6			13x6-5-6			13x5-6			13x6-5-6			
Front	13x5-6			13x6-5-6			13x5-6			13x6-5-6			
Rear	22x9-5-10			23x9-5-12			23x9-5-12			23x10-5-12			
TRAVELING SPEEDS	8 (12.87)						9 (14.48)						
Forward	mph (km/h)						Internal Integrated in Axle						
Parking Brake	8 (12.87)						9 (14.48)						
DIMENSIONS	Internal Integrated in Axle												
Overall Length	80.7 (2,049.78)			81.7 (2,075.18)			80.7 (2,049.78)			81.7 (2,075.18)			
Overall Width (Chute Down)	60.7 (1,541.78)			67.3 (1,709.42)			60.7 (1,541.78)			67.3 (1,709.42)			
Overall Height (ROPS Upright)	70.5 (1,790.7)			72.6 (1,844.04)			70.5 (1,790.7)			72.6 (1,844.04)			
Wheelbase	48.5 (1,231.9)			49.5 (1,257.3)			48.5 (1,231.9)			49.5 (1,257.3)			
Width (Tire to Tire)	in. (mm)			50.3 (1,277.62)			48.5 (1,231.9)			49.5 (1,257.3)			
Approximate Curb Weight	lb. (kg)			893 (405.05)			910 (412.76)			948 (430.00)			
MOVER DECK	Fabricated												
Mower Deck Type	Fabricated												
Lift Mechanism	Foot Pedal												
Deck Steel Thickness	10-gauge with 7-gauge at edge area												
Anti-Scalp Ball Rollers	5 (4 front, 1 rear)			6 (4 front, 2 rear)			8 (4 front, 4 rear)			5 (4 front, 1 rear)			
Cutting Width of Mower	in. (mm)			48 (1,219.2)			54 (1,371.6)			60 (1,524)			
Blades	Notched (Optional Serrated)												
Cutting Height	in. (mm)												
Discharge Chute	1.5-5 (38.1-127)												
Deck Height Adjustment	Slide (Molded Rubber)												
SEAT	Dial Type												
Suspension	1" Suspension Kit Available						Standard (1.5" Suspension)						
Sliding Adjustment	Standard						Standard						
Arm Rest & Seat Belt	Standard						Standard						
STANDARD/OPTIONAL	Standard												
Foldable ROPS	Optional						Standard						
Head Light	Optional						Standard						

* NOTE : Specifications and design are subject to change without notice. Not available for sale in California. † NOTE: Denotes ZXC LT models.



KIOTI Tractor Division
 DAEDONG - USA, INC.
 6300 KIOTI Drive, Wendell, NC 27591 USA

Toll free 877-60-KIOTI • Fax 919-374-5001
 Web www.KIOTI.com



OPTIONAL EQUIPMENT

- Mulching Kit
- Hitch Kit
- Headlamp Kit
- Anti-Scalp Roller Kit (64" models only)
- Work Lamp Kit

LIT-ZTR-ALL.1